

CORK PLANK

MICRO BEVELED 4 SIDES



Corkcomfort

Nature at your feet


WICANDERS®

Originals collection



Accent O841004



Character O822005

Moods collection



Tea L810001



Chestnut L832001



Auburn L836001

Traces collection



Tea Q808002



Chestnut Q832001



Auburn Q836002

President collection




Spice F808001



Tea F810001



Chestnut F832002



Chocolate Brown F831001

What's new

Acrodur® by BASF

Wicanders flooring is now made with Acrodur®, a water based, eco-friendly binder used in the agglomeration process of cork. Acrodur® is 100% formaldehyde free promoting superior eco-efficiency and energy saving. A perfect combination between nature and technology.



Click Seal®

A glueless joint sealant, Click Seal® is designed to be applied on-site to the tongue side of planks, to eliminate core swelling caused by spills and excessive maintenance, and to offer a virtually waterproof floor in kitchens, entryways and other high-moisture environments



Wicanders Cork Plank is cut, stained, finished, beveled and packaged in the USA, creating a domestically manufactured product.

Amorim Flooring North America is a proud member of the US Green Building Council



Features

Xtreme WRT Finish: A ceramic micro-bead finish 4x more wear resistant than other finishes in its class

Micro beveled on 4 sides


Improved Corkloc® Floating Floor System: Now easier than ever to install

Installation system: Floating

Dimensions: 35-7/8 x 4-3/8 x 7/16"

Warranty: 15 Year Residential, 5 Year Light Commercial

Suitable for: Kitchen, Family Room, Bedroom, Basement, Dining Room, Playroom, Hallway, Office

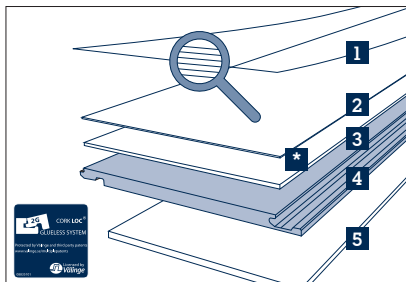

- 1.0 **XtremeWRT Varnish** 
 - 1.1 Top coat
 - 1.2 2nd ceramic layer
 - 1.3 Sand sealer
 - 1.4 1st ceramic layer
 - 1.5 filler
 - 1.6 Adhesion promoter
 - 2.0 **Genuine cork veneer**
 - 3.0 **Flexible and insulating cork layer**
 - 4.0 **HDF - high density fibreboard with CORKLOC®**
 - 5.0 **Integrated insulating cork underlay**
- * micro beveled edge

Benefits of cork plank



ENVIRONMENTALLY FRIENDLY

- Made of a renewable raw material
- Absorbs CO₂ reversing the effect of emissions
- Has very low VOC emission for healthier living



QUIET

- The honeycomb-like inner structure of cork is guaranteed to reduce noise
- Cork reduces sound transmission between floors and within rooms



LOW AND EASY MAINTENANCE

- The special surface finishes of Wicanders floors make them easier to clean and maintain
- A vacuum cleaner and damp mop are all that is required



FAST AND EASY INSTALLATION

- Floating floors with Corkloc® locking system are easier and faster to install
- Saves time and reduces installation expense



COMFORTABLE AND WARM

- Cork's shock absorbing properties relieve strain on feet, joints, legs and back
- The natural thermal insulation of Wicanders cork make the floor very warm to your bare feet



DURABLE



- The special surface finishes of Wicanders floors withstand years of wear and still look good as the day they were installed



Moods Tea

Traces
Chestnut

Technical Data Sheet

Test	Standard	Unit	Corkcomfort Floating WRT
Level of use	EN 685	Class	23 
Domestic			
Commercial			31 
General properties			
Dimensions	EN 427 / EN 428	mm Inches	910 x 111 x 10,5 35 7/8 x 4 3/8 x 7/16
Safety properties			
Critical radiant flux	ASTM E 648-3	Watts/ Cm ²	.23
Specific optical density	ASTM E 662-03	Density	Flaming: 199 / Non flaming: 177
Static coefficient of friction	ASTM C1028-89	Coef.	Dry: 0.65; Wet: 0.69
Additional properties			
Impact sound reduction	ISO 140-8	dB	16
Step sound	NF S 31 - 074	dB	78
STC sound transmission class	ASTM E413-87	dB	54
IIC Impact insulation class	E492-04	dB	58
Scratch resistance	EN 438	N	1,60
Impact resistance	EN 438	N	Small ball: 14
		mm (high falling)	Big ball: 1300
Effect of stains (a)	EN 438, part 2	Grade (1 = surface destruction; 5 = no visible changes)	5 (b)
		Surf. dulling	Rate 0 (c)
		Surf. attack	No change
Chemical resistance	ASTM F925-97	Color change	No change

(a) The following products were tested: acetone, coffee, NaOH, Hydrogensuperoxyde (H₂O₂, 3%), Black shoe cream, Citrus acid (solution of 10%) · (b) Acetone causes grade 1 effects · (c) Rate 0 = no observed effect. The following products were tested: 5% acetic acid vinegar; 70% isopropyl alcohol, Mineral oil, NaOH Sodium oxide, 5% HCl Hydrochloric acid, 5% H₂SO₄ Sulfuric acid, 5% NaOCl Household ammonia, 5% Phenol disinfectant, Kerosene, Olive oil, Unleaded gasoline



AMORIM

Excellence in flooring

Amorim Flooring North America

2600 Cabover Drive, Suite A
Hanover, MD 21076 · USA
Tel: 410 553 6062 (6063 / 6064)
Fax: 410 553 6123
e-mail: info.ar.us@amorim.com
www.wicanders.com

